


AFA-1 set

The passive PoE set of injector and extractor is used to power most RouteBOARDs. It is a 100Mbps cable variant that can be used to power any device with a corresponding input power connector. The PoE set does not meet the IEEE 802.3af / at specifications.

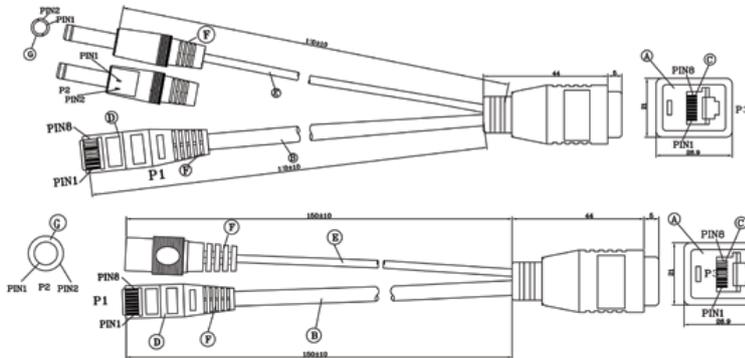

Advantages

- input and output cables terminated with RJ45 connectors
- input and output power cables has 2.2/5.5mm connectors

Číslo pinu	LAN	PoE napájení
1	Data	-
2	Data	-
3	Data	-
4	-	Power (+)
5	-	Power (+)
6	Data	-
7	-	Ground (-)
8	-	Ground (-)



Specification

- DC input voltage: 5 up to 48V
- Max. output power: 48W
- Operating temperature: -10 ~ +60°C