

## DS-K1109DKFB-QR Card Reader



- Supports RS-485 and Wiegand (W26, W34) protocol
- Supports reading Desfire card, Felica card and M1 card
- Supports authentication via card, password, fingerprint and QR code
- Supports bluetooth module
- Tamper-proof function

## ▪ Specification

Interface	
TAMPER	1
RS-485	1
Wiegand	1
Authentication	
Card type	M1 card,DESfire card,Felica card
General	
Power supply	12 VDC
Power consumption	With load: ≤ 14 w Without load: ≤ 4 w
Working temperature	-40 °C to 65 °C (-40 °F to 149 °F)
Working humidity	0 to 90% (no condensing)
Dimensions	125 mm × 84.5 mm × 18 mm (4.92" × 3.33" × 0.71")
Installation	Wall mounting
Weight	≤ 1 kg (2.20 lb)
Buzzer	Support
Function	
Barcode recognition	Support Format: Code 128, Interleaved 2 of 5, Matrix 2 of 5, Code 39, Codebar, Code 9 and UCC/EAN-128
QR code recognition	Support

## ▪ Available Model

DS-K1109DKFB-QR

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global




Hikvision  
Corporate Channel



hikvisionhq

▪ **Dimension**

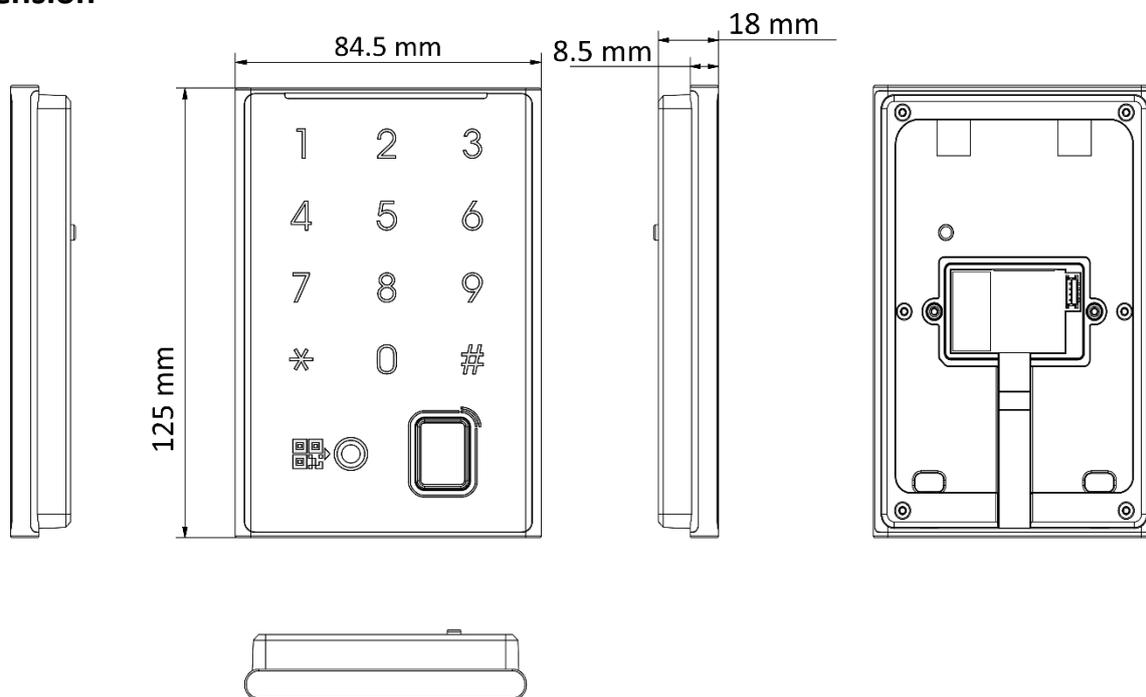

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

