

DS-K2621X(P) Pro Series Access Controller



- Supports 1-door control
- Supports IPv4, IPv6 and DHCP
- Supports AES256, RSA2048, and TLS 1.2 encryption protocols
- Web configuration management. All configurations can be realized via web without software application
- Supports professional access control applications such as multi-door interlocking and anti-passback
- Supports backup battery access
- Supports OSDP, and a variety of wiegend formats to connect to third-party card readers
- It has status indicators such as power supply, communication and operation, which is convenient for equipment health detection

▪ Specification


System	
Operating system	Linux
ROM	4 GB
RAM	128 MB
Network	
Network protocol	ISAPI,Hik-Connect,ISUP5.0
Wired network	10/100 Mbps self adaptive
Interface	
Network interface	1
Lock control	1
Exit button	1
Door contact input	1
Alarm input	2
Alarm output	2
TAMPER	1
RS-485	2 for card reader (1 for communication, 1 for redundancy; each interface can connect up to 2 readers)
Wiegand	2, standard 26/34 input, supports custom Wiegand settings
Fire interface	Support
Capacity	
User capacity	100000
Fingerprint capacity	10000
Card capacity	100000
Event capacity	300000
Linked door capacity	1
Linked card reader capacity	2 RS-485 card readers (OSDP protocol) and 2 Wiegand card readers
Authentication	
Fingerprint recognition duration	< 1 s
General	
Indicator	Support
Battery	Charge and discharge
Power supply	12 ± 15% VDC
Power consumption	≤ 42 W
Working temperature	-10 °C to 55 °C (14 °F to 131 ° F)
Working humidity	0% to 90% (No condensing)
Installation	Wall mounting
Language	English, Thai, Traditional Chinese, Indonesian, Vietnamese, Arabic, Spanish (Europe), Spanish (South America), Italian, French, Dutch, Russian, Ukrainian, Portuguese (Europe), Portuguese (Brazil), Serbian, Croatian, Bulgarian, German, Greek, Romanian and Turkish
Function	
Configuration via Web browser	Support
Hik-Connect	Support
HikCentral Professional	Support

HikCentral Connect	Support
Hik-Partner Pro	Support
Multi-factor authentication	Support
First person in	Support
Anti-passback	Support
Multi-door interlocking	Support

▪ **Available Model**

DS-K2621X(P)

▪ **Dimension**

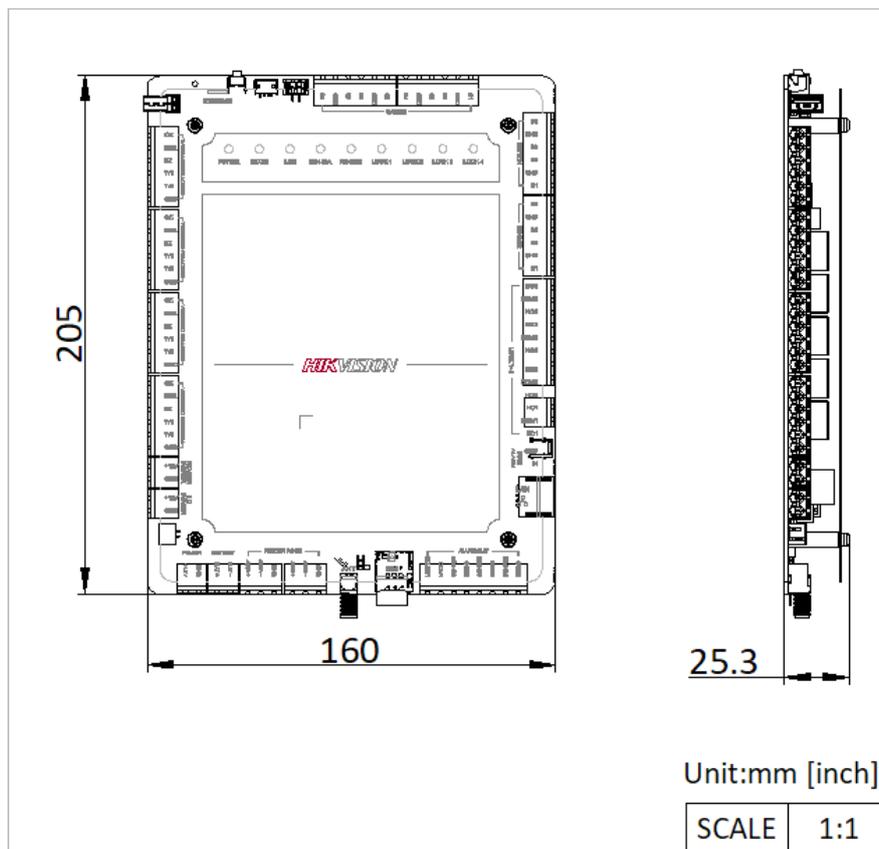

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

